

## TUMBLE DRYERS

**DX**  
RANGE

| DX 11          | DX 13          | DX 16        | DX 24        |
|----------------|----------------|--------------|--------------|
| 11,5KG<br>25LB | 13,5KG<br>29LB | 16KG<br>35LB | 24KG<br>52LB |



### FEATURES

- Easy to use timer
- Electrical, Gas and Steam heating
- Large door opening for easy loading and unloading  
(Ø 57cm DX11,13,16, Ø 68cm DX24)
- Galvanized drum
- Axial airflow
- Large lint filter

### OPTIONS

- Stainless steel drum
- Stainless steel front panel with black painted door
- Coin operated version
- Full OPL microprocessor
- Reversing drum
- Residual moisture control Sensodry+®  
(only with Full OPL microprocessor):
  - lower energy and utility costs
  - lower linen replacement costs
- SafeTech™ Fire Suppression System



FAST DRYING



EASY  
OPERATION




SERVICE  
FRIENDLY

senso.dry+

SafeTech™

GET AHEAD IN LAUNDRY

| TYPE                  |        | DX11                                                                           | DX13          | DX16          | DX24          |
|-----------------------|--------|--------------------------------------------------------------------------------|---------------|---------------|---------------|
| CAPACITY              |        |                                                                                |               |               |               |
| Capacity              | kg     | 11,5                                                                           | 13,5          | 16            | 24            |
| Drum volume           | l      | 217                                                                            | 271           | 347           | 491           |
| Drum diameter         | mm     | Ø 673                                                                          | Ø 673         | Ø 762         | Ø 838         |
| AIRFLOW               |        |                                                                                |               |               |               |
| 50 Hz                 | l/s    | 203                                                                            | 203           | 260           | 283           |
| 60 Hz                 | l/s    | 236                                                                            | 236           | 307           | 330           |
| DRYING AVERAGE        |        |                                                                                |               |               |               |
| Gas heating           | g/min  | 222                                                                            | 258           | 331           | 444           |
| Electric heating      | g/min  | 172                                                                            | 272           | 335           | 399           |
| MOTOR                 |        |                                                                                |               |               |               |
| Fan                   | kW     | 0,187                                                                          | 0,187         | 0,187         | 0,375         |
| Drive                 | kW     | 0,187                                                                          | 0,187         | 0,187         | 0,375         |
| GAS HEATING           |        |                                                                                |               |               |               |
| Energy                | kW     | 18,8                                                                           | 21,4          | 26,4          | 29,9          |
| Energy                | kBTU/h | 64                                                                             | 73            | 90            | 102           |
| Electrical connection |        | 1×200-240V 50/60Hz, 3×200-240V 50/60Hz<br>3×380-415V 50Hz, 3×380-415/440V 60Hz |               |               |               |
| Gas connection        | NPT    | ½"                                                                             | ½"            | ½"            | ½"            |
| STEAM HEATING         |        |                                                                                |               |               |               |
| High pressure 6,9 bar | kW     | 39,6                                                                           | 39,5          | 48,6          | -             |
|                       | kBTU/h | 135                                                                            | 134,7         | 166           | -             |
| Electrical connection |        | 1×200-240V 50/60Hz, 3×200-240V 50/60Hz<br>3×380-415V 50Hz, 3×380-415/440V 60Hz |               |               |               |
| Steam connection      | NPT    | ¾"                                                                             | ¾"            | ¾"            | -             |
| ELECTRICAL HEATING    |        |                                                                                |               |               |               |
| Energy                | kW     | 12                                                                             | 21            | 24            | 27            |
| Electrical connection |        | 3×200-240V 50/60Hz, 3×380-415 50Hz, 3×380-415/440V 60Hz                        |               |               |               |
| EXHAUST               | Ø /mm  | 152                                                                            | 152           | 203           | 203           |
| DIMENSIONS            |        |                                                                                |               |               |               |
| Size H×W×D            | mm     | 1622×711×1038                                                                  | 1622×711×1191 | 1622×800×1191 | 1695×876×1362 |
| Net weight            | kg     | 137                                                                            | 150           | 164           | 197           |
| TRANSPORT DATA        |        |                                                                                |               |               |               |
| Packed H×W×D          | mm     | 1753×762×1092                                                                  | 1753×762×1245 | 1753×838×1245 | 1829×902×1489 |
| Gross weight          | kg     | 151                                                                            | 165           | 179           | 216           |

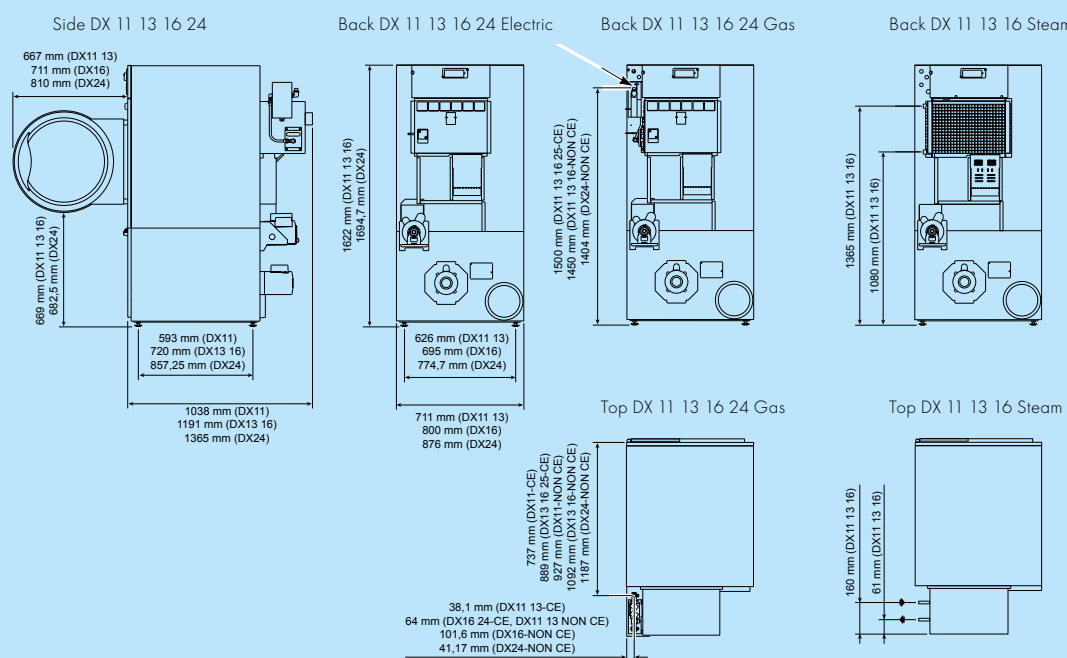

The company preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

[www.primuslaundry.com](http://www.primuslaundry.com)

Primus by Alliance Laundry Systems



12-2017